

Features

HIGH CURRENT CARRY AND HIGH VOLTAGE

Inert gas filled arc chamber suitable for high voltage switching

COMPACT STRUCTURE, LOW NOISE

Small, low-profile design with low noise while carrying or switching loads

COIL ECONOMIZER

Dual coil for low power consumption

SAFE FOR EXPLOSIVE ENVIRONMENTS

No arc leakage due to a hermetically sealed design

HIGH RELIABILITY DESIGN

Hermetic sealing creates a stable environment for high voltage switching

NO SPECIFIC MOUNTING ARRANGEMENT

Mountable in any orientation without reduction of performance

VARIOUS APPLICATIONS

Battery disconnect, EV charging, energy storage systems, photovoltaics, power control, circuit protection and much more

Sealing Type: Ceramic



Certification Information

- 1. Meet RoHS (2011/65/EU)
- 2. CE certified
- 3. UL approved

Nomenclature

AEVT500

B

-

Series code:
"AEVT500" = AEVT500

Coil Voltage Code:
"B" = 12VDC
"C" = 24VDC

Options (applied in this order):
Blank = Std. Options (Bottom Mount, Without Aux)
"A" = With Aux. Contact (SPST-NO)

High Voltage DC Contactor

AEVT500 Series

500A+/1800VDC



Product Data Sheet

MAIN CONTACT		
Contact Arrangement		1 Form X (SPST-NO)
Rated Operating Voltage		12-1,800VDC
Continuous Carry Current		500A ^{*1}
Max short circuit current		3,300A @ 320VDC (1 cycle)
Dielectric Withstanding Voltage (initial)	Between Open Contacts	4,000VDC (leakage ≤1mA)
	Between Contacts to Coil	2,200Vrms (leakage ≤1mA)
Insulation Resistance (Initial)	Terminal to Terminal	Min. 100 M Ω@500VDC
	Terminals to Coil	
Contact Voltage Drop(initial)		≤70mV @350A

OPERATE / RELEASE TIME	
Operate Time (includes bounce)	40ms, Max.
Release Time	20ms, Max.


ENVIRONMENTAL DATA		
Shock	Functional	196m/s ² Sine half-wave pulse
	Destructive	490m/s ² Sine half-wave pulse
Operating Temperature		-40 to +85°C
Vibration, Sine, Peak, 20G		10 to 1,000Hz
Weight		3.38 lb (1.53 kg)

EXPECTED LIFE	
500A @ 450VDC (make/break)	3,000 cycles
500A @ 650VDC (make/break)	1,000 cycles
Mechanical life	200,000 cycles

COIL DATA		
Nominal Voltage	12VDC	24VDC
Pick-up Voltage (25°C)	9.9VDC	19.7VDC
Drop-out Voltage (25°C)	2VDC	4VDC
Inrush current @ nominal voltage ^{*2}	3.3A	1.7A
Holding current @ nominal voltage ^{*2}	0.74A	0.37A

Current Carry Curve

Cross-sectional area of the copper bar is 240mm²

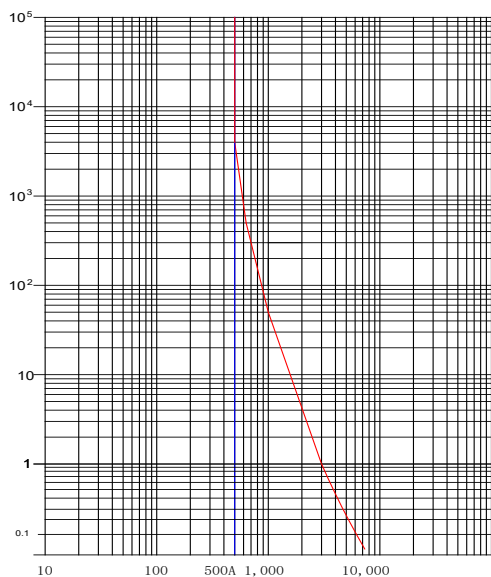


AUX. CONTACT	
Aux. Contact Arrangement	SPST-NO (1 Form A)
Aux. Contact Rating (Max Wattage)	10W
Aux. Contact Rating (Max Voltage)	100 VDC
Aux. Contact Resistance (Max)	500m Ω

Note:


1. Current is relevant to cross-sectional area of conductor.
2. Two coil design

Product Data Sheet

Estimated Make & Break Resistive Load Ratings

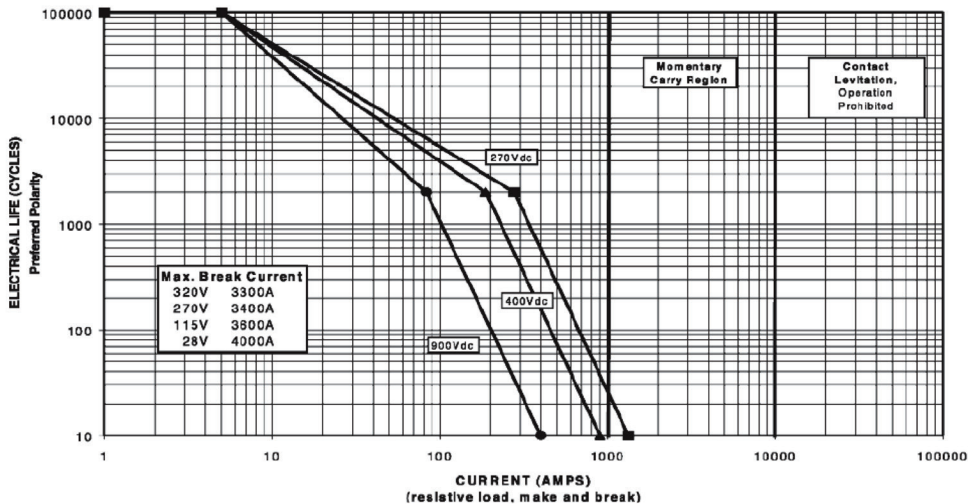

Outline Dimensions : inches (mm)

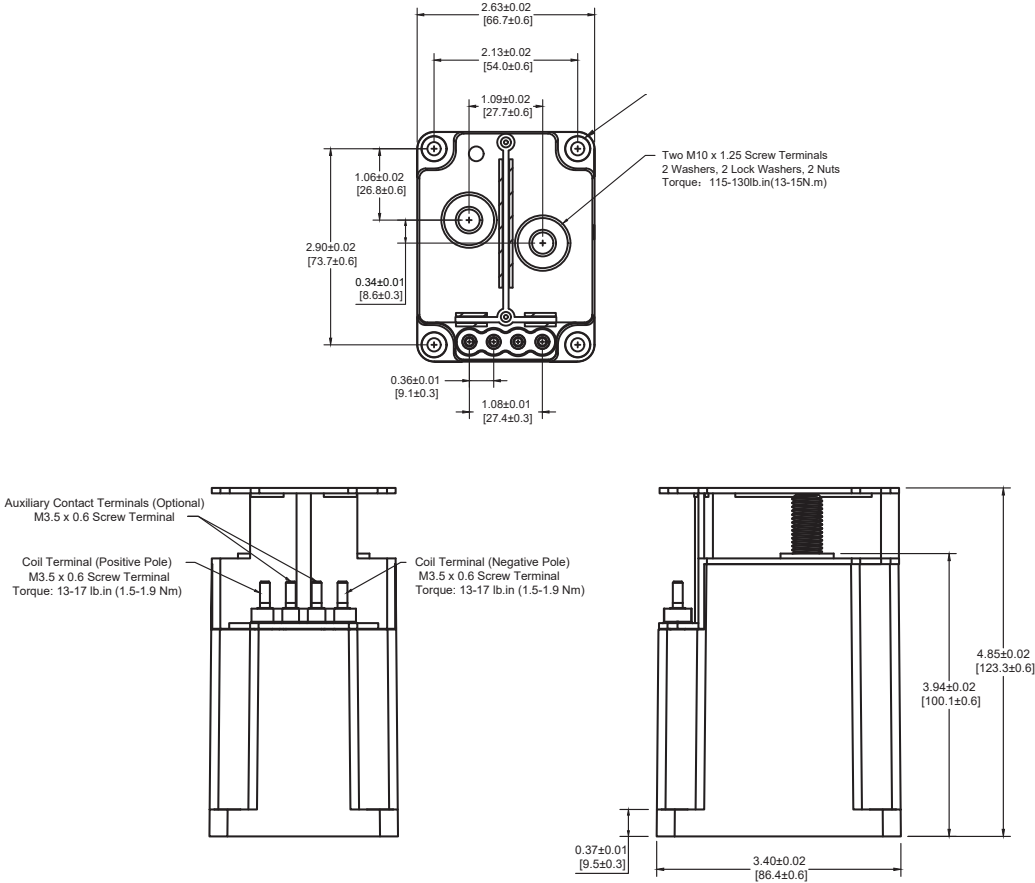

Application Notes

1. Be sure to use split washers to prevent nut from loosening, all the terminals or conductors must be in direct contact with the contactor's terminals.
 - Contact Terminal Torque: 115 - 130 lb.in (13 - 15 N.m)
 - Mounting Torque: 26 - 35 lb.in (3 - 4 N.m)
2. Contact terminals are polarized so refer to drawing during connecting. There is a reverse surge absorption circuit so that it is not necessary to use a surge protective device.
3. Do not use if dropped.
4. Avoid installing in a strong magnetic field (close to a transformer or magnet), or near a heat source.
5. Electrical life:
Use per load capability and life cycle limits so as not to cause a function failure (treat the contactor as a product with specified life and replace it when necessary). It is possible to make parts burn around the contactor once operating failure occurs. It is necessary to take layout considerations into account and to make sure power shall be cut off within 1 second.
6. Avoid debris or oil contamination of the main terminals to optimize contact and avoid excess heat generation.